



LB-H2-SP2, LB-H2-SP4, LB-H2-SP8

Link Bridge™ 1x2, 1x4, or 1x8 HDMI 2.0 Splitter

Application Diagram



SPLITTER

Array Size	1x2 (LB-H2-SP2) 1x4 (LB-H2-SP4) 1x8 (LB-H2-SP8)
Input	One (1) HDMI 2.0 port
Output	Two (2), Four (4), or Eight (8) HDMI 2.0 ports
Control	EDID Selection: Internal standard mode or external TV mode
Service	USB, for firmware upgrade

PHYSICAL

Dimension (W x D x H)	9.45" x 4.26" x 1.00" (LB-H2-SP8) 9.12" x 4.26" x 1.00" (LB-H2-SP4) 5.04" x 4.26" x 1.00" (LB-H2-SP2)
Operating Temperature	0°C to 40°C
Storage Temperature	-20°C to 60°C
Power Supply	5V@2.6A



ORDERING INFORMATION

LB-H2-SP8	1x8 HDMI 2.0 Splitter
LB-H2-SP4	1x4 HDMI 2.0 Splitter
LB-H2-SP2	1x2 HDMI 2.0 Splitter

FEATURES

- An 1x2 (LB-H2-SP2), 1x4 (LB-H2-SP4) or 1x8 (LB-H2-SP8) HDMI 2.0 splitter with HDCP 2.2 compliance
- Supports video resolutions up to 3840×2160@60Hz & 4096×2160@60Hz with 4:4:4 YUV and HDR format
- Supports pass-through of audio formats including LPCM 2.0–7.1, Dolby Digital, DTS, Dolby Digital Plus, Dolby TrueHD, Dolby Atmos and DTS-HD Master Audio
- HDMI input supports internal standard EDID mode and external TV EDID mode settings
- System Reset function supported (with CEC active source command)

PANEL DRAWINGS

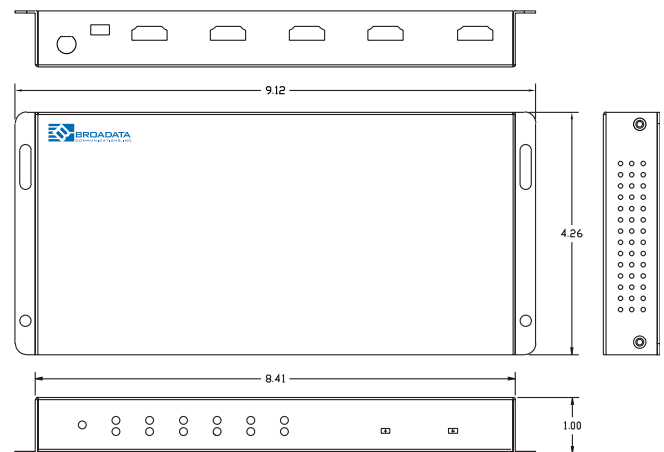

DOING MORE WITH ONE CABLE

